



用于IP-Link的piconet扩展模块 16路数字量输出0.5 A (总共4 A) SNNE-0016D-0002

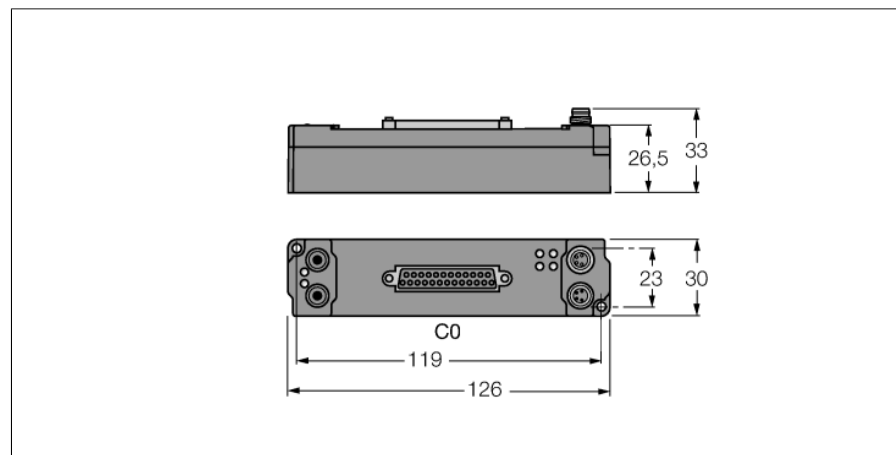


- 直接连接至IP Link
- 玻璃纤维增强外壳
- 密封模块电子元件
- 金属接插件
- 防护等级IP20

Sub-D 输出



M8 × 1 电源



$$I_{Bmax} = I_{Lmax} = 4 \text{ A}$$

型号	SNNE-0016D-0002
货号	6824476
通道数	16
工作/负载电压	20...29 VDC
工作电流	≤ 25 mA
Fibre-optic length	≤ 15 m
通道数	16 digital outputs acc. to EN 61131-2
输出电压	20...29 VDC, 来自负载电压
通道输出电流	0.5 A (Σ 4 A), 短路保护
负载类型	阻性, 感性, 灯
开关频率	≤ 500 Hz
同步因数	0.5
尺寸 (长/宽/高)	30 x 126 x 26.5 mm
振动测试	符合EN 60068-2-6标准
冲击测试	根据 DIN EN 60068-2-27
电磁兼容性	符合EN 61000-6-2/EN 61000-6-4标准
防护等级	IP20
认证	CE, cULus

过程映像中的数据

		Bit 7	Bit 6	Bit 5	Bit 4	Bit 3	Bit 2	Bit 1	Bit 0	
PROFIBUS-DP coupling module: "Byte alignment" is disabled (default) and byte n has been used halfway. DeviceNet™, CANopen, INTERBUS, Ethernet coupling module: Byte n has been used halfway. Up to 8 bit user data are mapped.	Output	Byte n	C0P4	C0P3	C0P2	C0P1	Is used by the physically preceding bit-oriented extension module connected via the IP Link.			
		Byte n+1	C0P12	C0P11	C0P10	C0P9	C0P8	C0P7	C0P6	C0P5
		Byte n+2	Is used by the physically following bit-oriented extension module connected via the IP Link.				C0P16	C0P15	C0P14	C0P13
PROFIBUS-DP coupling module: "Byte alignment" is disabled (default) and the previous byte has been completely used or "byte alignment" is active. DeviceNet™, CANopen, INTERBUS, Ethernet coupling module: The previous byte has been completely used. Up to 8 bit user data are mapped.	Output	Byte n	C0P8	C0P7	C0P6	C0P5	C0P4	C0P3	C0P2	C0P1
		Byte n+1	C0P16	C0P15	C0P14	C0P13	C0P12	C0P11	C0P10	C0P9
		C... = Connector no. – P... = Pin no.								