
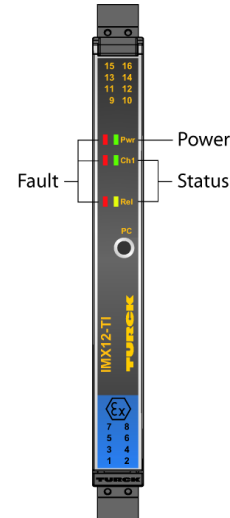


Temperature measuring amplifier

1-channel

IMX12-TI02-1TCURTDR-1I1R-CPR/24VDC/CC

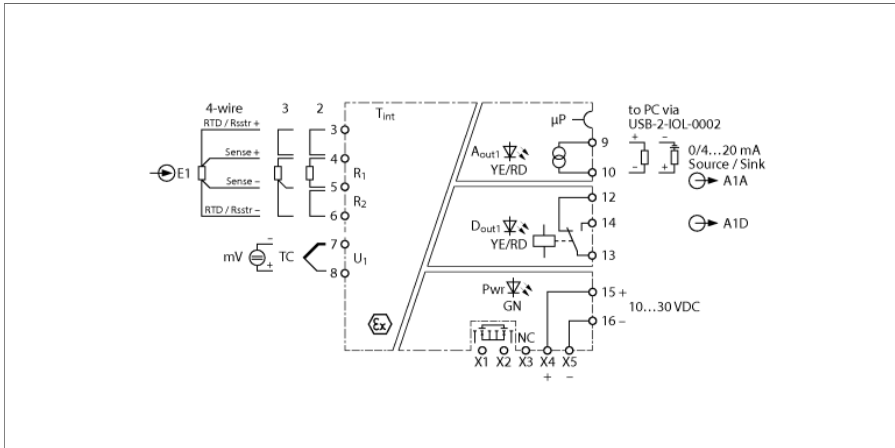

The 1-channel temperature measuring amplifier IMX12-TI02-1TCURTDR-1I1R-CPR/24VDC/CC has inputs for: Thermocouples acc. to IEC 60584, DIN 43710, GOST R 8.585-2001, low voltages (-150 ... +150 mV), RTDs acc. to IEC 60751, DIN 43760, GOST 6651-94 (2, 3 and 4-wire) and resistors 0...5 k Ω (2, 3 and 4-wire). The device can be powered from a power bridge that also transmits a collective fault signal.

The cold junction compensation can be set to internal, external, or to a constant value. The device is configured via the PC interface. The current outputs can be set to 0/4 ... 20 mA and as source or sink. The unit features an additional invertible complementary contact relay output that facilitates the monitoring of set limits for exceedance/shortfall and monitoring using a window function.

A green LED indicates operational readiness. A fault in the input circuit leads to a flashing red LED according to NE44, an internal error to a steady red LED. The fault current can be adjusted to < 3.5 mA or > 21.5 mA.

The device can be used in safety circuits up to SIL2 (high and low demand according to IEC 61508) and meets the requirements of NE21. It is equipped with removable spring type terminals.

The device can be used in safety circuits up to SIL 2 (high and low demand according to IEC 61508) (hardware fault tolerance HFT = 0).

The device is equipped with removable spring-type terminals.

- Input circuits monitored for wire-break and short-circuit
- Parameterized via PC
- Complete galvanic isolation
- Removable spring type terminals
- Power bridge (connector incl. in delivery)
- ATEX, IECEx, cFM, cUL, NEPSI, INMETRO, Kosha, TS
- Use in Zone 2
- SIL 2

Type	IMX12-TI02-1TCURTD R-111R-CPR/24VDC/CC
ID	7580506
Nominal voltage	24 VDC
Operating voltage U_s	10...30 VDC
Power consumption	≤ 2 W
Power dissipation, typical	≤ 1.6 W

Input circuits	<p>RTD Type DIN EN 60751 Pt50, Pt100, Pt 500, Pt1000</p> <p>RTD Type DIN EN 43760 Ni50, Ni100, Ni500, Ni1000</p> <p>RTD Type Gost 6651-94 Pt50, Pt100, Pt 500, Pt1000, CU50, Cu53, Cu100, CU500, CuZn100</p> <p>TC Type DIN EN 60584 Type A, Type B, Type C, Type E, Type J, Type K, Type N, Type R, Type S, Type T</p> <p>TC Type DIN 43710 Type L</p> <p>TC Type Gost 8.585-2001 Type A1, Type A2, Type A3, Type L, Type M</p> <p>Low voltage input -150...150 mV</p> <p>Resistance input 0...5000 ohms</p> <p>Thermocouples -50...200°C; 0...400°C; 0...600°C</p>
----------------	--


Output circuits	
Output current	Source/sink (10...30 V) 0/4...20 mA
Load resistance current output	≤ 0.8 k Ω
Output circuits (digital)	1 x relay (change-over)
Output switching voltage relay	≤ 30 VDC / ≤ 250 VAC
Switching current per output	≤ 2 A
Switching capacity per output	≤ 500 VA/60 W
Switching frequency	≤ 15 Hz
Contact quality	AgNi

Power-Bridge common alarm output	MOSFET, $U_{max} = 30$ V, $I_{max} = 100$ mA
----------------------------------	--


Response characteristic	
Reference temperature	23 °C
Measuring accuracy current output (including linearity, hysteresis and repeatability)	± 10 μ A
Temperature drift analog output	0.0025 %/K
Accuracy, RTD input, 0...500 ohm	± 50 m Ω
Temperature drift, RTD input, 0...500 ohm	± 5 m Ω /K
Accuracy, RTD input, 500...5000 ohm	± 500 m Ω
Temperature drift, RTD input, 500...5000 ohm	± 30 m Ω /K
Measuring accuracy TC input (including linearity, hysteresis and repeatability)	± 15 μ V
Temperature drift, TC input	± 3.2 μ V/K
Cold junction compensation error	with cold junction compensation < 2 K
Note	With a 3-wire connection, the errors double

Galvanic isolation	
Test voltage	2.5 kV RMS
Input 1 to output 1	375 V peak value acc. to EN 60079-11
Input 1 to supply	375 V peak value acc. to EN 60079-11
A1A supply voltage	300 V RMS acc. to EN 50178 and EN 61010-1
A1D supply voltage	300 V RMS acc. to EN 50178 and EN 61010-1
A1A-A1D	300 V RMS acc. to EN 50178 and EN 61010-1

Dimensions



Output relay – Load curve

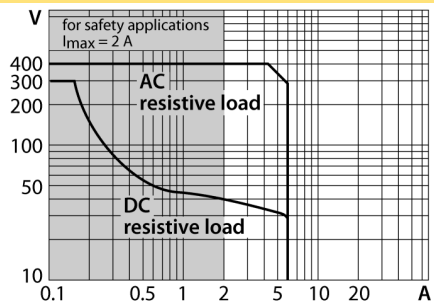


Important note	For Ex-applications the values specified in the corresponding Ex certificates (ATEX, IECEx, UL, etc.) apply.
Ex approval acc. to conformity certificate	TÜV 15 ATEX 168214 X
Application area	II (1) G, II (1) D
Ignition protection category	[Ex ia Ga] IIC; [Ex ia Da] IIIC
Application area	II 3 (1) G
Ignition protection type	Ex nA [ia Ga] IIC T4 Gc
Important note	If the device is used in applications to achieve functional safety according to IEC 61508, the safety manual must be used. Information in the data sheet are not valid for functional safety.
Use in SIL safety circuits	SIL 2 acc. to IEC 61508
Displays/Operating elements	
Operational readiness	Green
Switching state	Yellow
Error indication	red

Mechanical data			
Protection class	IP20		
Flammability class acc. to UL 94	V-0		
Ambient temperature	-25...+70 °C		
Storage temperature	-40...+80 °C		
Dimensions	120 x 12.5 x 128 mm		
Weight	179 g		
Mounting instructions	DIN rail (NS35)		
Housing material	Plastic, Polycarbonate/ABS		
Electrical connection	Removable spring-type terminals, 2-pin		
Connection variant	Power bridge with collective fault signal		
Terminal cross-section	0.2...2.5 mm ² (AWG: 24...14)		
Environmental conditions	Operating height	Up to 2000 m above sea level	
	Pollution degree	II	
	Surge/Overvoltage category	II (EN 61010-1)	
	Standards used		
	Voltage resistance and insulation		EN 50178
			EN 61010-1
			EN 50155
			GL VI-7-2
	Shock		EN 61373 class B
			EN 50155
			GL VI-7-2
			EN 60068-2-6
			EN 60068-2-27
	Temperature		EN 60068-2-1 Ad
			EN 50155
			GL VI-7-2
			EN 60068-2-2 Bd
			EN 60068-2-1
	Air humidity		EN 60068-2-38
	EMC		EN 50155
			GL VI-7-2
			NE21
			EN 61326-1
		EN 61326-3-1	
		EN 61000-4-2	
		EN 61000-4-3	
		EN 61000-4-4	
		EN 61000-4-5	
		EN 61000-4-6	
		EN 61000-4-11	
		EN 61000-4-29	
		EN 55011	
		EN 55016	
		EN 50121-3-2	
	EN 61000-6-2		

Accessories

Type code	Ident no.		Dimension drawing
IMC 1.5/ 5-ST-3.81 BK	7580954	Power Bridge Connection Terminal	
MCVR 1.5/ 5-ST-3.81 BK	7580955	Power Bridge Connection Terminal	
MC 1.5/ 5-ST-3.81 BK	7580956	Power Bridge Connection Terminal	
E/ME TBUS NS35 BK	7580957	Power Bridge Connection Terminal	
USB-2-IOL-0002	6825482	IO-Link Master with integrated USB port	
IOL-COM/3M	7525110	IO-Link communication line for connecting IO-Link devices to an IO-link master via a 3.5-mm jack plug	

Accessories

Type code	Ident no.		Dimension drawing
IMX12-PS02-UI-UIR-PR/24VDC/CC	7580611	Power supply module power bridge; Collective fault signal via relay; Single and redundant power supply via terminals; Removable screw terminals	
IMX12-SC-2X-4BK	7580940	Screw terminals for IM(X)12 modules; included in delivery: 4 pcs. of 2-pin black terminals	
IMX12-SC-2X-4BU	7580941	Screw terminals for IM(X) 12 modules; included in delivery: 4 pcs. of 2-pin blue terminals	
IMX12-CC-2X-4BK	7580942	Spring terminals for IM(X)12 modules; included in delivery: 4 pcs. black terminals, 2-pin	
IMX12-CC-2X-4BU	7580943	Spring terminals for IM(X)12 modules; included in delivery: 4 pcs. blue terminals, 2-pin	
IMX12-2-CJT	100003646		