



# Modul de extensie piconet pentru IP-Link 16 ieșiri digitale 0,5 A (4 A în total) SNNE-0016D-0002

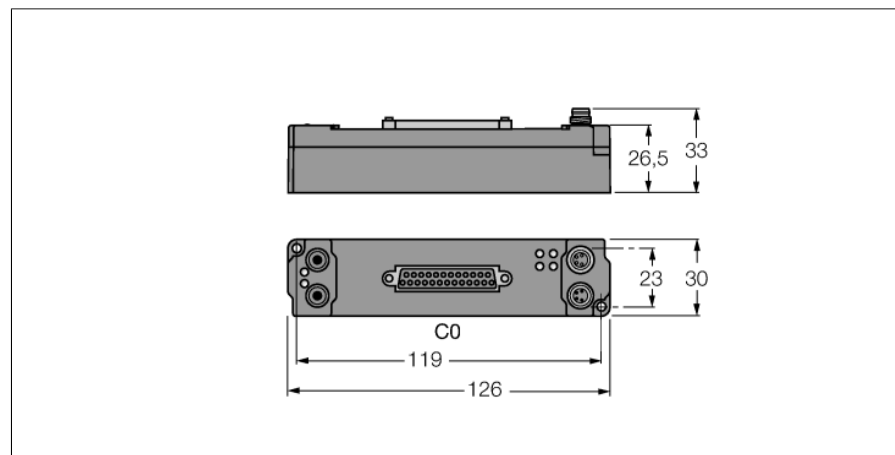


- Conexiune directă la IP link
- Carcasă armată cu fibră de sticlă
- Electronica modului încapsulată în rășină
- Conector metalic
- Grad de protecție IP20

## Ieșire Sub-D



## M8 × 1 Alimentare



|                                                 |                                           |
|-------------------------------------------------|-------------------------------------------|
| Tip                                             | SNNE-0016D-0002                           |
| Nr. ID                                          | 6824476                                   |
| Număr de canale                                 | 16                                        |
| Tensiune de alimentare / tensiune de sarcină    | 20...29 Vcc                               |
| Curent de alimentare                            | ≤ 25 mA                                   |
| Lungime fibră optică                            | ≤ 15 m                                    |
| Număr de canale                                 | 16 ieșiri digitale conform EN 61131-2     |
| Tensiune de ieșire                              | 20...29 Vcc de la tensiunea de alimentare |
| Curent de ieșire pe canal                       | 0.5 A (Σ 4 A), protejat la scurtcircuit   |
| Tip de sarcină                                  | rezistiv, inductiv, bec de sarcină        |
| Frecvență de comutare                           | ≤ 500 Hz                                  |
| Simultaneity factor                             | 0.5                                       |
| Dimensiuni (l x L x h)                          | 30 x 126 x 26.5 mm                        |
| Test vibrații                                   | Conf. cu EN 60068-2-6                     |
| Test la șocuri mecanice                         | conform DIN EN 60068-2-27                 |
| Compatibilitate electromagnetică (interferențe) | Conf. cu EN 61000-6-2/EN 61000-6-4        |
| Clasă de protecție                              | IP20                                      |
| Certificări                                     | CE, cULus                                 |

## Process image pentru date de intrare

|                                                                                                                                                                                                                                                                                                         |        | Bit 7    | Bit 6                                                                                              | Bit 5 | Bit 4 | Bit 3 | Bit 2                                                                                              | Bit 1 | Bit 0 |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------|----------|----------------------------------------------------------------------------------------------------|-------|-------|-------|----------------------------------------------------------------------------------------------------|-------|-------|
| PROFIBUS-DP coupling module:<br>"Byte alignment" is disabled (default) and byte n has been used<br>halfway.<br>DeviceNet™, CANopen, INTERBUS, Ethernet coupling module:<br>Byte n has been used halfway. Up to 8 bit user data<br>are mapped.                                                           | Output | Byte n   | C0P4                                                                                               | C0P3  | C0P2  | C0P1  | Is used by the physically preceding<br>bit-oriented extension module<br>connected via the IP Link. |       |       |
|                                                                                                                                                                                                                                                                                                         |        | Byte n+1 | C0P12                                                                                              | C0P11 | C0P10 | C0P9  | C0P8                                                                                               | C0P7  | C0P6  |
|                                                                                                                                                                                                                                                                                                         |        | Byte n+2 | Is used by the physically following<br>bit-oriented extension module<br>connected via the IP Link. |       |       | C0P16 | C0P15                                                                                              | C0P14 | C0P13 |
| PROFIBUS-DP coupling module:<br>"Byte alignment" is disabled (default) and the previous byte has<br>been completely used or "byte alignment" is active.<br>DeviceNet™, CANopen, INTERBUS, Ethernet coupling module:<br>The previous byte has been completely used.<br>Up to 8 bit user data are mapped. | Output | Byte n   | C0P8                                                                                               | C0P7  | C0P6  | C0P5  | C0P4                                                                                               | C0P3  | C0P2  |
|                                                                                                                                                                                                                                                                                                         |        | Byte n+1 | C0P16                                                                                              | C0P15 | C0P14 | C0P13 | C0P12                                                                                              | C0P11 | C0P10 |
|                                                                                                                                                                                                                                                                                                         |        |          | C... = Connector no. – P... = Pin no.                                                              |       |       |       |                                                                                                    |       |       |