


Inductive sensor Ni4-M12-RD4X


TURCK

Industrial
Automation



- Threaded barrel, M12 x 1
- Chrome-plated brass
- DC 2-wire, 10...65 VDC
- NC contact
- Cable connection

Wiring diagram



Functional principle

Inductive sensors detect metal objects contactless and wear-free. For this, they use a high-frequency electromagnetic AC field that interacts with the target. Inductive sensors generate this field via an RLC circuit with a ferrite coil.


Type code	Ni4-M12-RD4X
Ident no.	4405010
Rated switching distance Sn	4 mm
Mounting conditions	non-flush
Assured switching distance	$\leq (0,81 \times S_n) \text{ mm}$
Correction factors	St37 = 1; Al = 0.3; stainless steel = 0.7; Ms = 0.4
Repeatability	$\leq 2 \% \text{ of full scale}$
Temperature drift	$\leq \pm 10 \%$
Hysteresis	1...15 %
Ambient temperature	-25...+70 °C
Operating voltage	10...65VDC
Residual ripple	$\leq 10 \% U_{ss}$
DC rated operational current	$\leq 100 \text{ mA}$
Residual current	$\leq 0.6 \text{ mA}$
Rated insulation voltage	$\leq 0.5 \text{ kV}$
Short-circuit protection	yes/ cyclic
Voltage drop at I_n	$\leq 5 \text{ V}$
Smallest operating current I_m	$\geq 3 \text{ mA}$
Switching frequency	1 kHz
Construction	threaded barrel, M12 x 1
Dimensions	54 mm
Housing material	metal, CuZn, chrome-plated
Material active area	plastic, PA
End cap	Plastic, EPTR
Max. tightening torque housing nut	10 Nm
Connection	cable
Cable quality	5.2 mm, LifYY, PVC, 2m
Cable cross section	2 x 0.34 mm ²
Vibration resistance	55 Hz (1 mm)
Shock resistance	30 g (11 ms)
IP Rating	IP67
MTTF	2283 years acc. to SN 29500 (Ed. 99) 40 °C
Switching state	LED yellow

Inductive sensor Ni4-M12-RD4X

TURCKIndustrial
Automation

Distance W	3 x Sn
Distance T	45 mm
Distance S	6 mm
Distance G	6 x Sn
Distance N	2 x Sn

Diameter of the active area B	Ø 12 mm
-------------------------------	---------



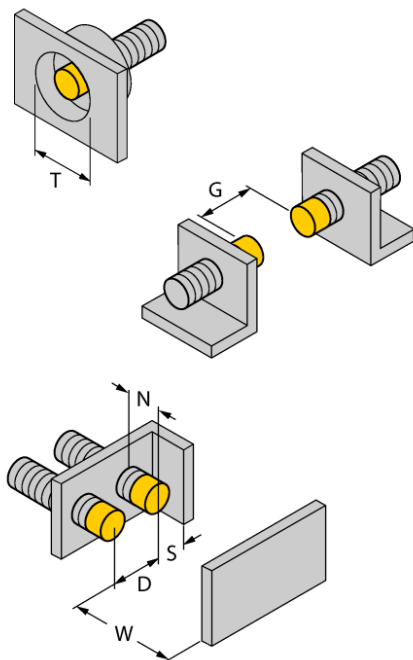


Inductive sensor Ni4-M12-RD4X

TURCK

Industrial
Automation

Accessories

Type code	Ident no.	Description	Design
QM-12	6945101	Quick-mount bracket with dead-stop; material: Chrome-plated brass Male thread M16 x 1. Note: The switching distance of proximity switches can be reduced by the use of quick-mount brackets.	
BST-12B	6947212	Fixing clamp for threaded barrel devices, with dead-stop; material: PA6	
MW-12	6945003	Mounting bracket for threaded barrel devices; material: Stainless steel A2 1.4301 (AISI 304)	
BSS-12	6901321	Mounting bracket for smooth and threaded barrel devices; material: Polypropylene	